
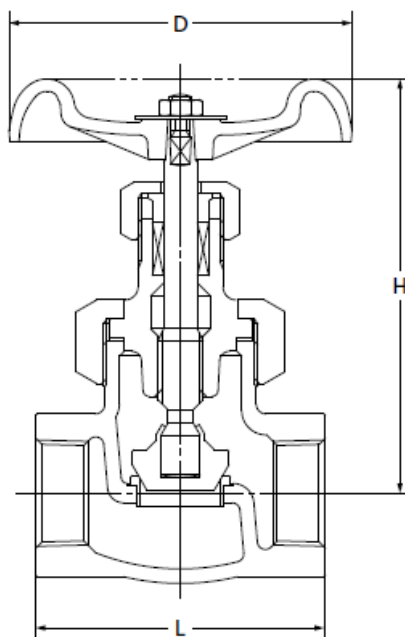


10K Globe Valve

10SP
U.B.I.S.

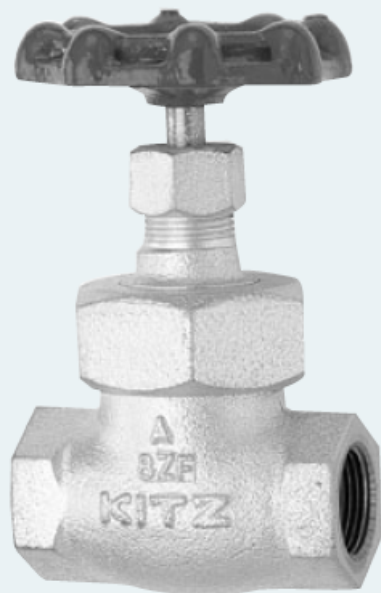

E-E dimension : JV 4-4 ★
End threads : JIS B 0203
★ KITZ Std. for $\frac{3}{8}$ "

120°C Static water.....1.4MPa
220°C Steam, air, gas, oil.....1.2MPa
300°C Steam, air, gas, oil.....1.0MPa

- Use for lubricating or hydraulic oil is acceptable. Contact KITZ Corporation for technical advice, if valves are used as heat transfer media.
- Employment of copper gasket prohibits use of this valve for ammonia or amine chemicals.

Materials

Parts	JIS material
Body	FCD-S
Bonnet	FCD-S
Stem	SUS420J2
Disc	SUS403
Body seat ring	SUS403
Gland	SUS403 ($\frac{1}{2}$ " & $\frac{3}{4}$ " : SUS420J2)
Gland packing	Non-asbestos Packing
Packing nut	FCD-S
Handwheel	FCD450
Wheel nut	SS400
Bonnet ring	FCD-S
Gasket	C1100P-0
Name plate	A1050P

Dimensions

Size	mm	10	15	20	25	32	40	50	mm
	inch	$\frac{3}{8}$	$\frac{1}{2}$	$\frac{3}{4}$	1	1 $\frac{1}{4}$	1 $\frac{1}{2}$	2	
L		64	70	80	90	110	120	140	
H (open)		107	125	125	145	162	180	198	
D		60	80	80	100	115	115	135	