
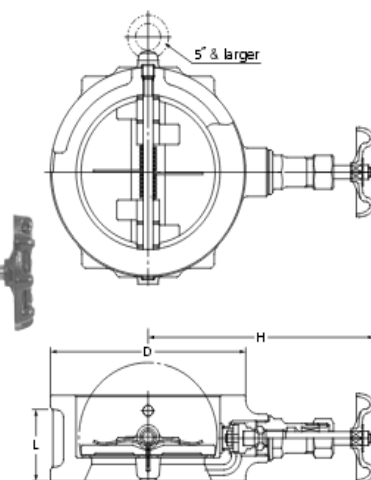


20K Wafer Check Valve

20SW

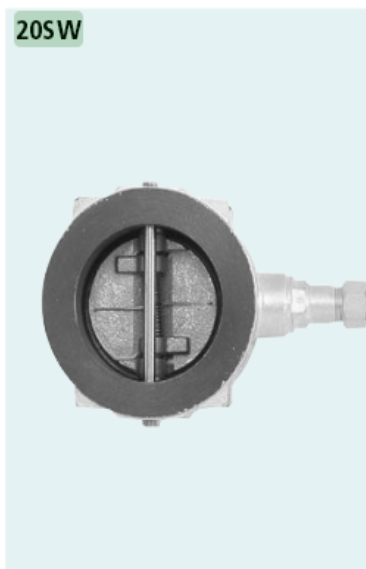

F-F dimension : KITZ Std.

80°C Static water 2.8MPa
80°C W.O.G. 2.0MPa

- Use for lubricating or hydraulic oil is acceptable.
- Employment of copper gasket prohibits use of this valve for ammonia or amine chemicals.

Materials

Parts	JIS material
Body	FCD-S + NBR
Bonnet	FCD-S
Stem	SUS420J2
Disc	CA C406
Plug	SWCH10R
Spring	SUS304
Gland	SUS403 (2" ~ 5" : SUS420J2)
Gland packing	Non Asbestos Packing
Gasket	C1100P
Handwheel	FCD45 0-10

Dimensions

Size	mm	50	65	80	100	120	150	200	250	300	mm
	inch	2	2½	3	4	5	6	8	10	12	
L		54	60	67	67	83	95	127	140	181	
H (open)		153	173	179	192	205	246	271	297	323	
D		101	121	137	162	200	235	280	353	403	