

TSF-10S,10SF,11S,11SF



Features

1. The TSF-10S/10SF/11S/11SF can discharge condensate effectively without retention, and realize energy saving steam system without steam loss.
2. All-stainless steel construction provides great durability and corrosion resistance.
3. Incorporated thermostatic air vent discharges air inside the piping and shortens warming-up time.
4. By turning the cock, it is possible to meet various flow direction such as horizontal or vertical installation.
Flow direction can be switched easily without disassembly such as detaching the cover.
5. Since the main parts are installed on the cover, it is possible to disassemble the cover with the body installed on the piping so the inspection and parts replacement can be conducted easily.



TSF-10S,11S




TSF-10SF,11SF

Specifications

Model		TSF-10S	TSF-10SF	TSF-11S	TSF-11SF
Nominal size		15A-25A		25A-50A	
Application		Steam condensate			
Working pressure		TSF-1□S□-5: 0.01-0.5 MPa TSF-1□S□-10: 0.01-1.0 MPa TSF-1□S□-21: 0.01-2.1 MPa			
Maximum temperature		220°C			
Material	Body	Cast stainless steel			
	Float	Stainless steel			
	Valve, valve seat	Stainless steel			
Connection		JIS Rc screwed NPT screwed	JIS 10K FF flanged JIS 20K FF flanged ASME Class 150 flanged ASME Class 300 flanged EN PN25 flanged	JIS Rc screwed NPT screwed	JIS 10K FF flanged JIS 20K FF flanged ASME Class 150 flanged ASME Class 300 flanged EN PN25 flanged

Caution for Installation

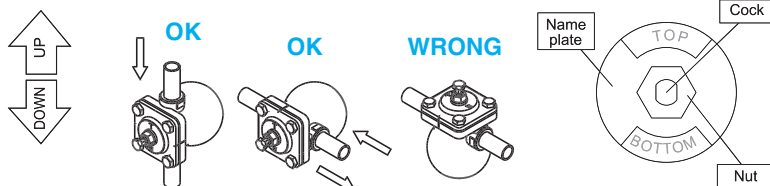

Adjust direction of the name plate in no pressure condition after installation.

Fix the cock with spanner and loosen the nut. Turn the cock and adjust direction of the name plate to position "TOP" and "BOTTOM" signs on upside and downside respectively. Fix the cock with spanner and fasten the nut after adjustment.


■ Dimensions (mm) and Weights (kg)

·TSF-10S


Nominal size	d	L	A	A ₁	H	Weight
15A	Rc/NPT 1/2	135	173	88.5	110	3.6
25A	Rc/NPT 1	139	173	88.5	110	3.7
20A	Rc/NPT 3/4	135	173	88.5	110	3.6

·TSF-10SF

Nominal size	L	A	A ₁	H	Weight(JIS 10K)	Weight(JIS 20K)
15A	195	173	88.5	110	4.8	5.0
20A	215	173	88.5	110	5.2	5.4
25A	235	173	88.5	110	6.2	6.6




TSF-10S



TSF-10SF

■ Maximum Continuous Discharge Capacity Chart

·TSF-10S, 10SF

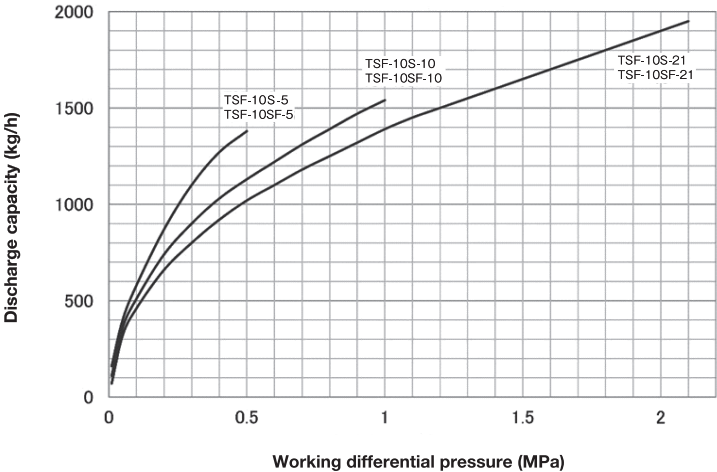

The discharge capacity shown in the charts on the above is the maximum value. In designing a system, select a steam trap with a sufficient safety factor (more than two times the regular level).